

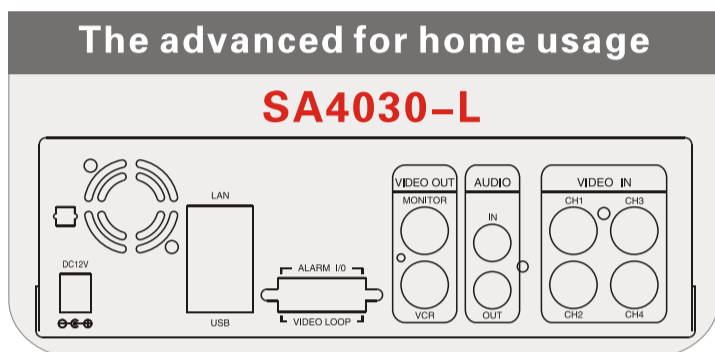


SA4030-C / SA4030 / SA4030-L

Rear panel

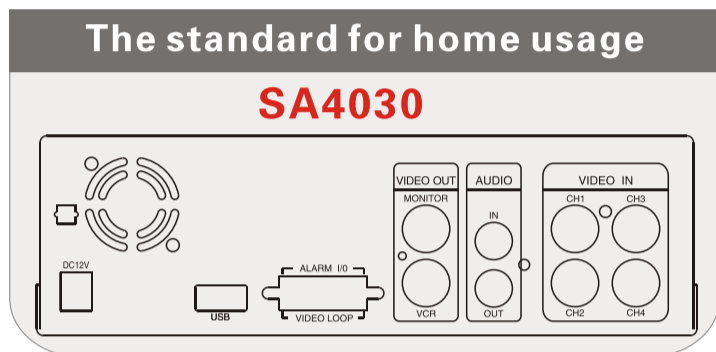

HDD anti-vibration Intellectual Property

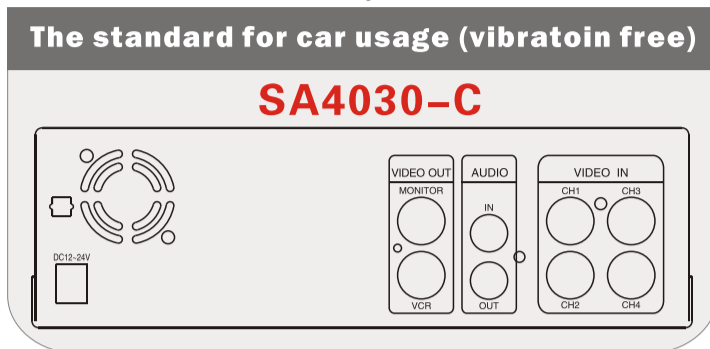

SPECIFICATIONS

	SA4030-C	SA4030	SA4030-L
OPERATION SYSTEM	Embedded RTOS		
Signal Format	NTSC/PAL		
Video Input Channel	4CH Composite		
Video Output Channel	2CH Composite (VCR OUT MONITOR OUT)		
Display Frame	NTSC	120 fps (4x30 fps)	
	PAL	100 fps (4x25 fps)	
Recording Frame Rate(QUAD)	NTSC	Max. 30 fps	
	PAL	Max. 25 fps	
Recording Frame Rate(EACH)	NTSC	Max. 7.5 fps (30 fps / 4)	
	PAL	Max. 6.25 fps (25 fps / 4)	
Recording Mode	Continuous / Motion / Programmed		
Resolution	Display	NTSC	720 x 480
		PAL	720 x 576
	Recording	NTSC	640 x 224
		PAL	640 x 272
Compression Format	Advanced MJPEG	Low	12K Bytes / Frame
		Normal	15K Bytes / Frame
		High	20K Bytes / Frame
HDD	Max. 400GB		
Audio Functions	1Ch Audio Input/Output Real Time Recording And Playing		
Search	Mode	Time / Date , Events list	
Alarm interface	NO		
	4ch Sensor Input /1Ch Alarm Output(N.O,N.C Max:AC120V /0.5A)		
Motion detect	4ch (5x6 quad) motion detect		
Video loss display	YES		
Auto ch_switching	YES		
Buzzer output mode	Video loss, motion, sensor		
Image adjust	Light, contrast, color		
Looping interface	NO		
	4ch looping video output with 75 Ohm		
USB interface	NO	USB 2.0 for H.D. Backup	
LAN interface	NO	MPG4 Comperssion and DVR control	
SXGA interface	NO		
Power type	DC 10V~26V /about 15W(add HD)		
	DC 12±0.5V /about 15W(add HD)		
Switching adapter	DC 12V/4A (AC100V~240V 50/60Hz)		
Dimension	195mm x 265mm x 65mm (W x D x H)		
Weight	About 2.8KG	About 2.9KG	