

Comparison


Model No.	Transmit Distance	Model No.	Transmit Distance
FUM-T4	Below 300M	FUM-T5	Below 300M
FUM-T4-A	300M ~ 600M	FUM-T5-A	300M ~ 600M
FUM-T4-A2	900M ~ 1200M	FUM-T5-A2	900M ~ 1200M

- * With (A) : Transmitter + Amplifier
- * Without (A) : Receiver
- * T4 : Terminal Block
- * T5 : RJ45 Connector



FUM-T4, Twisted-Pair Transmitter / Receiver


Video Input	2 Vp-p Video Signal
Video Output	Video Signal
Output Impedance	75Ohms
Transmit Distance	Below 300M

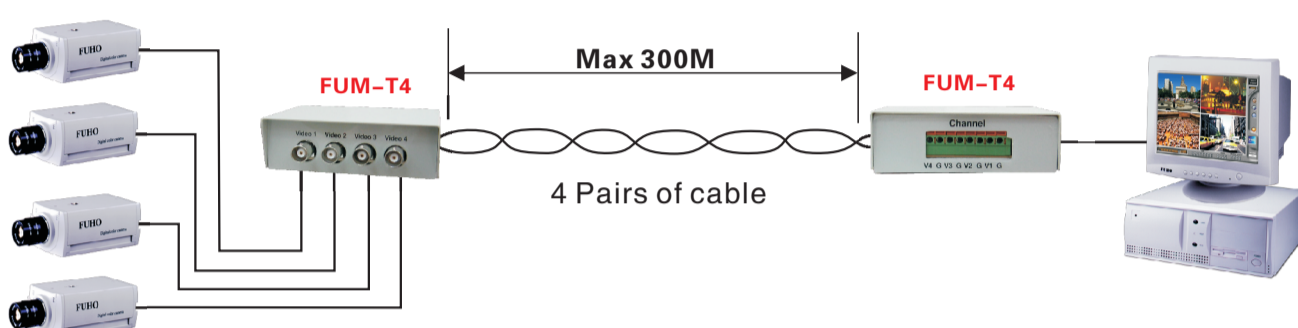

FUM-T4-A, Twisted-Pair Transmitter, with Amplifier



Video Input	2 Vp-p Video Signal
Video Output	Video Signal
Output Impedance	75Ohms
Power Supply	DC 12V
Power Consumption	50 mA
Transmit Distance	Dip Switch UP: below 300M Dip Switch DOWN: 300M ~ 600M
Option	FUM-T4-A2, for 900~1200M

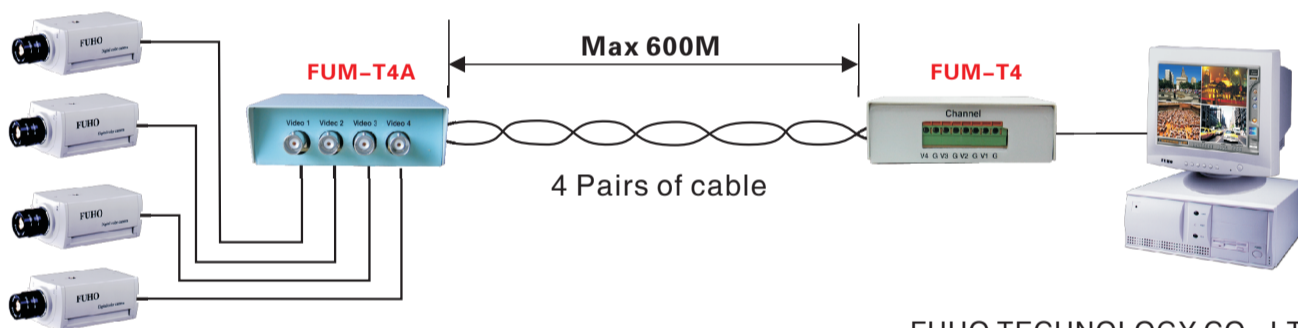


FUHO TECHNOLOGY CO., LTD.

FUM-T5, Twisted-Pair Transmitter / Receiver




Video Input	2 Vp-p Video Signal
Video Output	Video Signal
Output Impedance	75Ohms
Transmit Distance	Below 300M
Connector	RJ-45

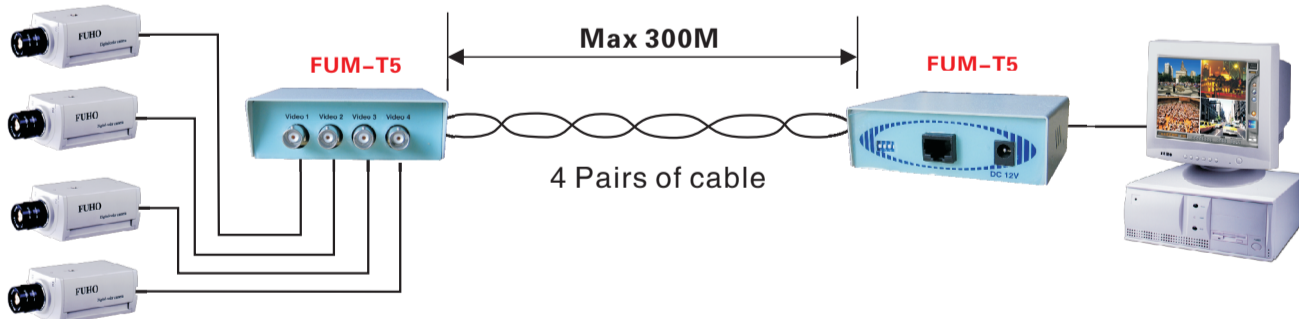

FUM-T5-A, Twisted-Pair Transmitter, with Amplifier



Video Input	2 Vp-p Video Signal
Video Output	Video Signal
Output Impedance	75Ohms
Power Supply	DC 12V
Power Consumption	50 mA
Transmit Distance	Dip Switch UP: below 300M Dip Switch DOWN: 300M ~ 600M
Option	FUM-T5-A2, for 900~1200M
Connector	RJ-45

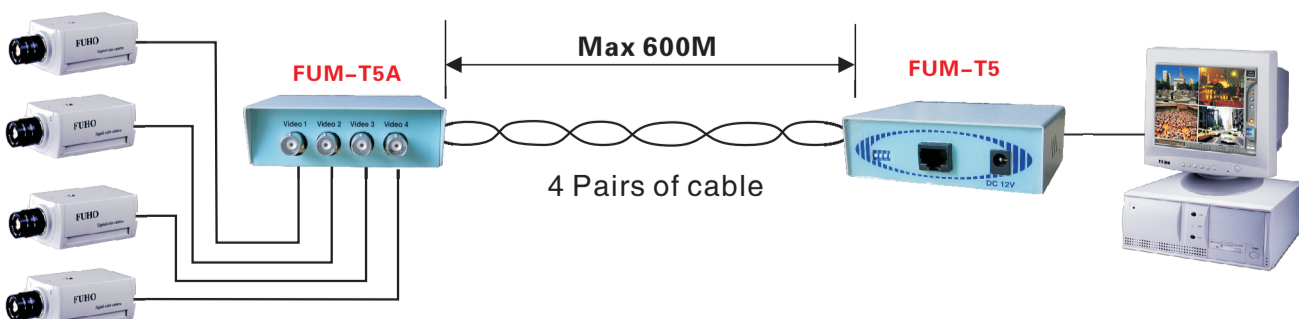

FUHO TECHNOLOGY CO., LTD.