


FUHO VIDEO SERVER

FUM-T10



Dimension UNT:mm

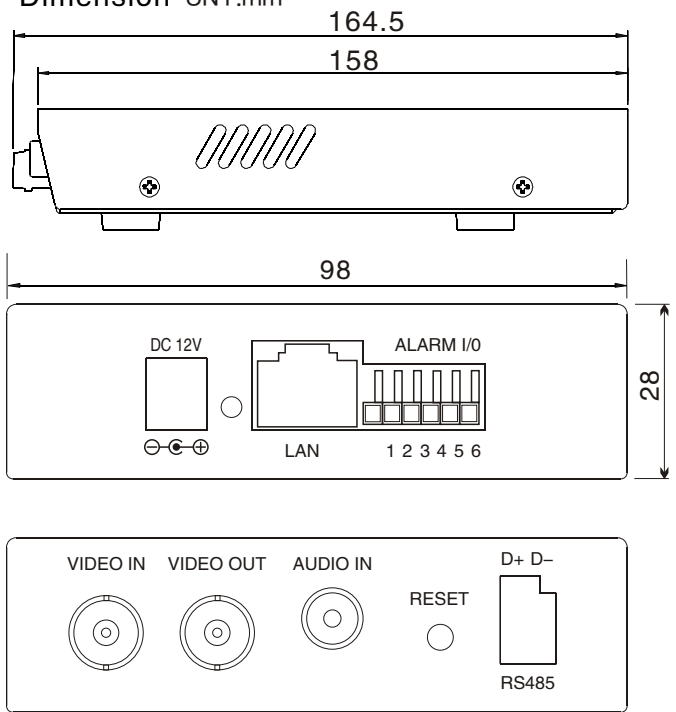

SPECIFICATION

Video stream formats	MPEG4 / JPEG	
Image/video type	VGA	640x240
	QVGA	320x240
	QQVGA	160x128
Video frame rate	VGA (MPEG-4)	8 frames/sec
	QVGA (JPEG)	10 frames/sec
	QVGA (MPEG-4)	26 frames/sec
Network protocols	TCP/UDP/IP, DHCP, SMTP, HTTP, NTP/SNTP, DDNS, TFTP	
File Transfer Format	AVI (MPEG-4/M-JPEG video stream with 32kbps ADPCM audio)	
Recording file format	AVI (MPEG-4/M-JPEG video stream with 32kbps ADPCM audio)	
Motion detection	Event Triggered on P frame variation External trigger by digital inputs	
Alert after motion detection is triggered	E-mail notification Send out a video clip thru mail Store video on a remote FTP server	
Web Browser support	Internet Explorer 6.0 or above IP address set Image 180° rotation functions Image mirroring functions Image Brightness Control functions Image Contrast Control functions Image Sharpness Control functions Support PTZ System (Protocol : FUHO MMS、 PELCO-D)	
Memory requirements	2M Bytes Flash ROM / 8M Bytes SDRAM	
LAN	10/100 based-T Ethernet port	
IO ports	One power jack One RJ-45 Ethernet port One external microphone connector One terminal block for 2 Digital Inputs and 1 Digital Output One CVBS video input One CVBS video bypass output One system reset button One RS-485 connector port	
Dimension	100mm (W) × 170mm (L) × 30mm (L)	
Weight	800g	
DC power input voltage	DC +12V	
Maximum Power consumption	400mA	
Operating temperature	5°C ~ 40°C	
Storage temperature	-5°C ~ 70°C	
Operating Humidity	10% ~ 80% (relative humidity, non-condensing)	