


FUHO

Twisted-Pair Transmitter



1. Function

- 1) short distance transmission
- 2) single port video signal transmission
- 3) maximum transmission distance --- 300 meter
- 4) coaxial cable to be replaced with twisted pairs
- 5) easy installation

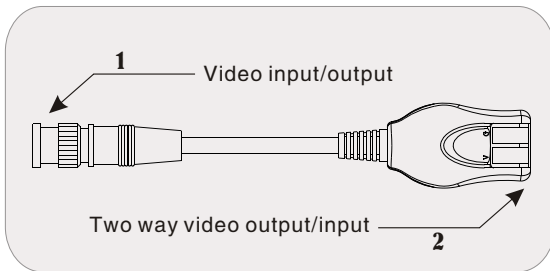


2. Dimension

- 1) Video input/output: video signal input or output to monitor (optional for F connector or BNC connector) ◦
- 2) two way video input/output: transmission/receiving available

Terminal block input/output	signal
V	video output (+)
G	video input (-)

3. Installation

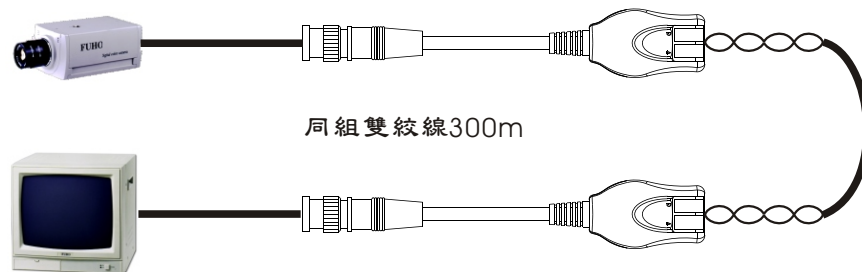

4. FUM-T1 Specifications

Item	FUM-T1	Remarks
Input	2Vp-p Video Signal	
Output	Video Signal	
Distance	Color Camera : 0~300m	
	B/W Camera : 0~400m	

5. Caution

- 1) Video input quality will determine the quality of the output signal and resolution
- 2) best use degree Cat.5e of 8C twisted pairs wires
- 3) wires must be in pairs of the same color
- 4) please adjust the brightness and saturation of the monitor to proper performance